


# CL

CE IP20 IP40 IP44 PZH

<b>Application</b>	Modern luminaires, designed for office spaces, flats and other interior applications.
<b>Installation</b>	Indoor
<b>Mounting</b>	Ceiling
<b>Material</b>	Anodized aluminium
<b>Details</b>	-
<b>CRI</b>	Min 80
<b>Options</b>	Other RAL coating, CRI >80, IP44
<b>Power supply</b>	230V, 50Hz
<b>Safety class</b>	I



<b>TYPE</b>	CL 2200	CL 4400	CL 6600	CL 8800
<b>WEIGHT</b>	1,6 kg	2,8 kg	4 kg	5,4 kg
<b>L</b>	600mm	1160mm	1720mm	2280mm

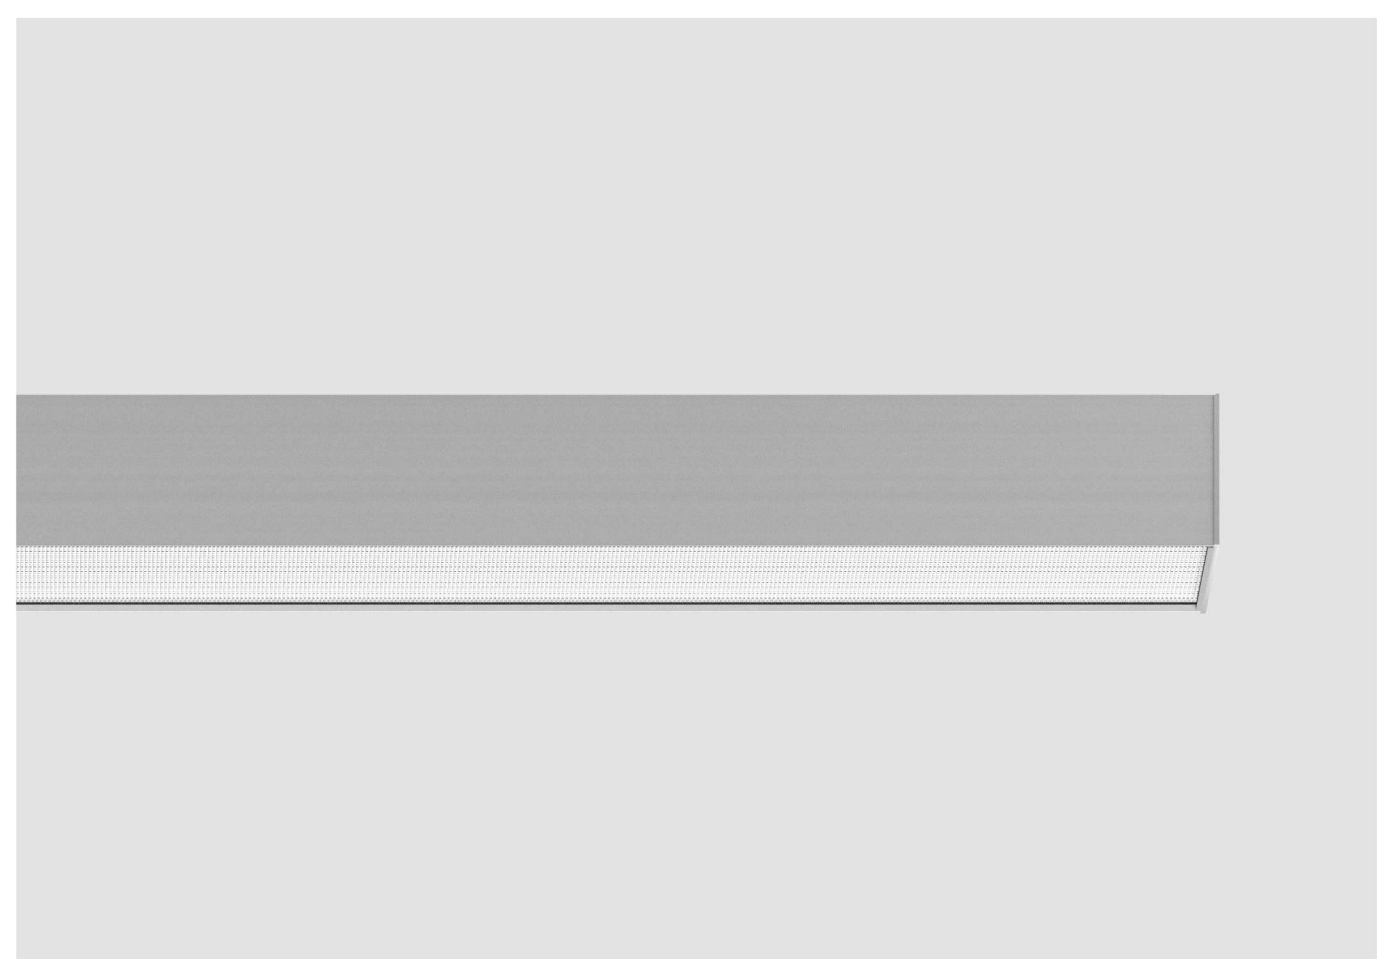

TYPE				
CL 2200	CL	2200	...	...
CL 4400	CL	4400	...	...
CL 6600	CL	6600	...	...
CL 8800	CL	8800	...	...

LED COLOR				
very warm white 2700K	CL	...	VW	...
warm white 3000K	CL	...	WW	...
neutral white 4000K	CL	...	NW	...

DIFFUSER / OPTICS				
M-PRM	...	...	...	MP
opal	...	...	...	OP
e.g.	CL	6600	WW	OP

FLUX INFORMATION [LED] DIRECT		DI
CL 2200 - 20W	VW	2220 lm
CL 2200 - 20W	WW	2260 lm
CL 2200 - 20W	NW	2370 lm
CL 4400 - 35W	VW	4230 lm
CL 4400 - 35W	WW	4300 lm
CL 4400 - 35W	NW	4500 lm
CL 6600 - 54W	VW	6290 lm
CL 6600 - 54W	WW	6400 lm
CL 6600 - 54W	NW	6700 lm
CL 8800 - 63W	VW	8270 lm
CL 8800 - 63W	WW	8400 lm
CL 8800 - 63W	NW	8800 lm

IN OPTION



CL EM



IN OPTION



CL PLUS

