



CL-W

CE IP20 IP40 IP44 PZH

| | |
|---------------------|---|
| Application | Wall luminaires designed for bathrooms, corridors and offices spaces. |
| Installation | Indoor |
| Mounting | Wall |
| Material | Anodized aluminium |
| Details | - |
| CRI | Min 80 |
| Options | Other RAL coating, CRI >80, IP44 |
| Power supply | 230V, 50Hz |
| Safety class | I |

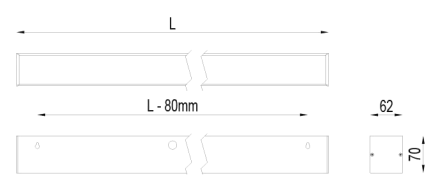

| TYPE | CL-W 2200 | CL-W 4400 | CL-W 6600 | CL-W 8800 |
|---------------|-----------|-----------|-----------|-----------|
| WEIGHT | 1,6 kg | 2,8 kg | 4 kg | 5,4 kg |
| L | 600mm | 1160mm | 1720mm | 2280mm |

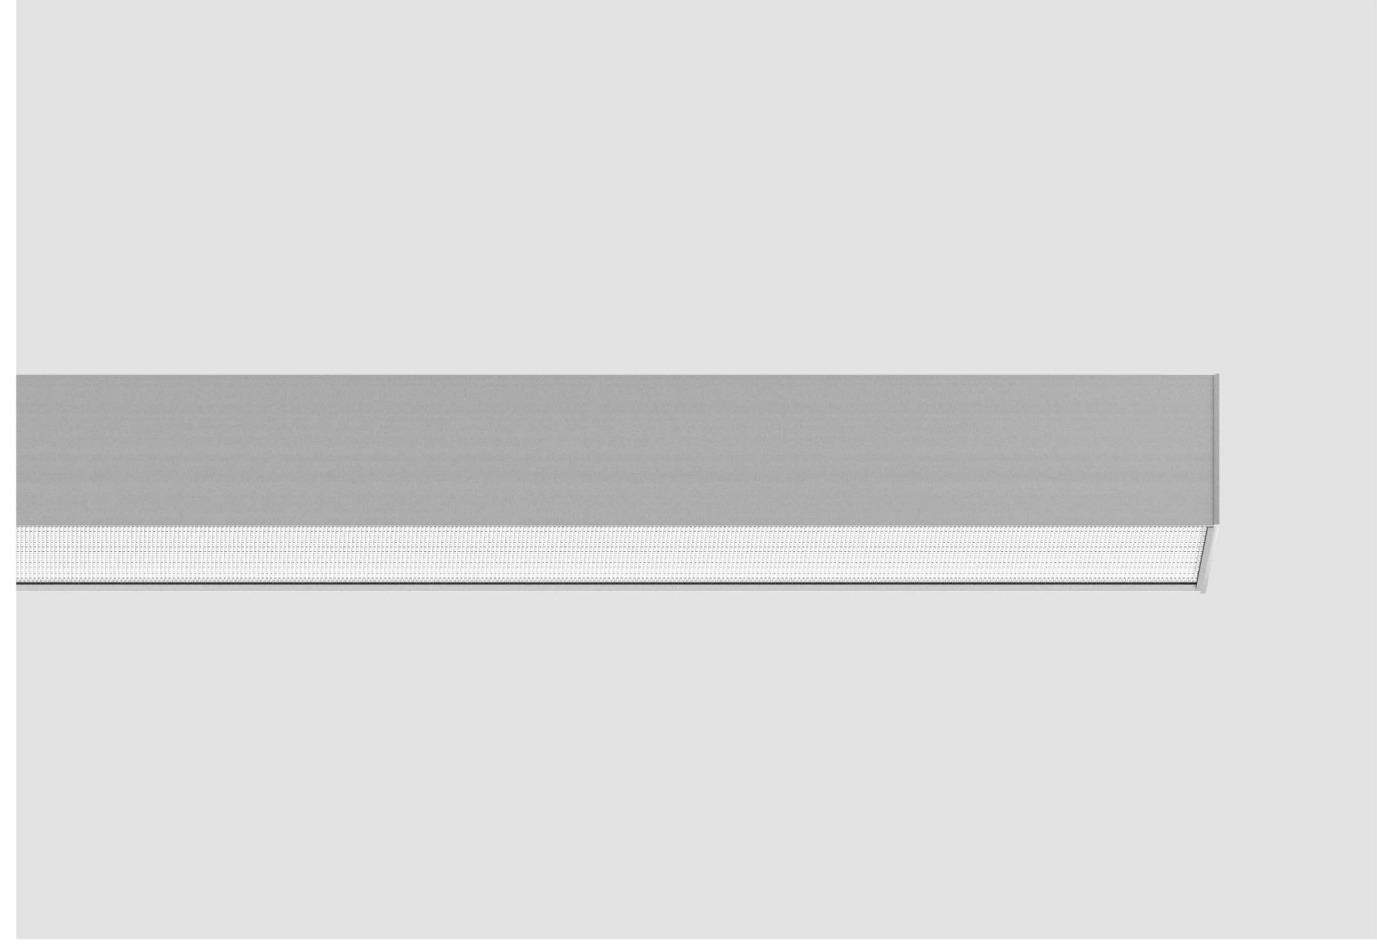

| TYPE | | | | |
|-----------|------|------|-----|-----|
| CL-W 2200 | CL-W | 2200 | ... | ... |
| CL-W 4400 | CL-W | 4400 | ... | ... |
| CL-W 6600 | CL-W | 6600 | ... | ... |
| CL-W 8800 | CL-W | 8800 | ... | ... |

| LED COLOR | | | | |
|-----------------------|------|-----|----|-----|
| very warm white 2700K | CL-W | ... | VW | ... |
| warm white 3000K | CL-W | ... | WW | ... |
| neutral white 4000K | CL-W | ... | NW | ... |

| DIFFUSER / OPTICS | | | | |
|-------------------|-----|-----|-----|-----|
| M-PRM | ... | ... | MP | ... |
| opal | ... | ... | OP | ... |
| PAR | ... | ... | PAR | ... |

| VERSION | | | | |
|-------------------|-----|-----|-----|-------|
| Direct | ... | ... | ... | ... |
| Direct - indirect | ... | ... | ... | DI-IN |

e.g. CL-W 6600 WW OP ...



| FLUX INFORMATION [LED] DIRECT | | |
|-------------------------------|----|---------|
| | DI | |
| CL-W 2200 - 20W | VW | 2220 lm |
| CL-W 2200 - 20W | WW | 2260 lm |
| CL-W 2200 - 20W | NW | 2370 lm |
| CL-W 4400 - 35W | VW | 4230 lm |
| CL-W 4400 - 35W | WW | 4300 lm |
| CL-W 4400 - 35W | NW | 4500 lm |
| CL-W 6600 - 54W | VW | 6290 lm |
| CL-W 6600 - 54W | WW | 6400 lm |
| CL-W 6600 - 54W | NW | 6700 lm |
| CL-W 8800 - 63W | VW | 8270 lm |
| CL-W 8800 - 63W | WW | 8400 lm |
| CL-W 8800 - 63W | NW | 8800 lm |

| FLUX INFORMATION [LED] DIRECT - INDIRECT | | |
|--|---------|----------------|
| | DI / IN | |
| CL-W 2200 - 26W | VW | 2110 / 1050 lm |
| CL-W 2200 - 26W | WW | 2150 / 1070 lm |
| CL-W 2200 - 26W | NW | 2250 / 1120 lm |
| CL-W 4400 - 54W | VW | 4230 / 2115 lm |
| CL-W 4400 - 54W | WW | 4300 / 2150 lm |
| CL-W 4400 - 54W | NW | 4500 / 2250 lm |
| CL-W 6600 - 67W | VW | 6100 / 3050 lm |
| CL-W 6600 - 67W | WW | 6200 / 3100 lm |
| CL-W 6600 - 67W | NW | 6500 / 3250 lm |
| CL-W 8800 - 98W | VW | 8260 / 4130 lm |
| CL-W 8800 - 98W | WW | 8400 / 4300 lm |
| CL-W 8800 - 98W | NW | 8800 / 4500 lm |

