


CL-X

CE IP20 IP40 IP44 PZH

Application	Recessed luminaires designed for offices spaces, flats and corridors.
Installation	Indoor
Mounting	Plaster-cardboard or modular ceilings
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating, CRI >80, IP44
Power supply	230V, 50Hz
Safety class	I

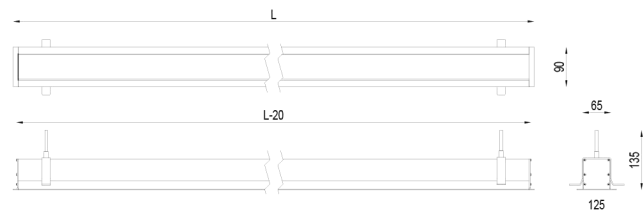

TYPE	CL-X 2200	CL-X 4400	CL-X 6600	CL-X 8800
WEIGHT	2,1 kg	3,4 kg	4,7 kg	6,2 kg
L	625mm	1185mm	1745mm	2305mm



TYPE	CL-X	2200
CL-X 2200	CL-X	2200
CL-X 4400	CL-X	4400
CL-X 6600	CL-X	6600
CL-X 8800	CL-X	8800

LED COLOR					
very warm white 2700K	CL-X	...	VW
warm white 3000K	CL-X	...	WW
neutral white 4000K	CL-X	...	NW

DIFFUSER / OPTICS					
M-PRM	MP	...
opal	OP	...
PAR	PAR	...

e.g. CL-X 6600 WW OP ...

IN OPTION



VINSTA® System



FLUX INFORMATION [LED] DIRECT

CL-X	Power	Color	DI
CL-X 2200	- 20W	VW	2220 lm
CL-X 2200	- 20W	WW	2260 lm
CL-X 2200	- 20W	NW	2370 lm
CL-X 4400	- 35W	VW	4230 lm
CL-X 4400	- 35W	WW	4300 lm
CL-X 4400	- 35W	NW	4500 lm
CL-X 6600	- 54W	VW	6290 lm
CL-X 6600	- 54W	WW	6400 lm
CL-X 6600	- 54W	NW	6700 lm
CL-X 8800	- 63W	VW	8270 lm
CL-X 8800	- 63W	WW	8400 lm
CL-X 8800	- 63W	NW	8800 lm

