



CL-ZW

CE IP20 IP40 IP44 PZH

Application	Modern luminaires, designed for office spaces, flats and other interior applications.
Installation	Indoor
Mounting	Suspended
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating, CRI >80, IP44
Power supply	230V, 50Hz
Safety class	I

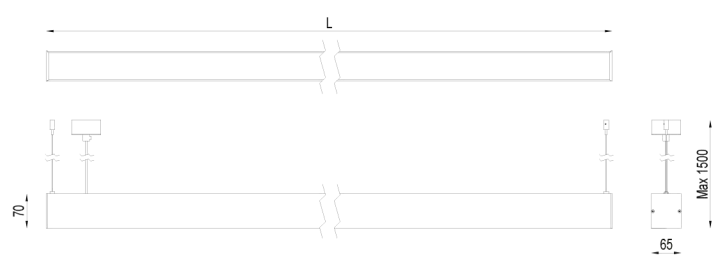

TYPE	CL-ZW 2200	CL-ZW 4400	CL-ZW 6600	CL-ZW 8800
WEIGHT	1,85 kg	3,05 kg	4,25 kg	5,65 kg
L	600mm	1160mm	1720mm	2280mm

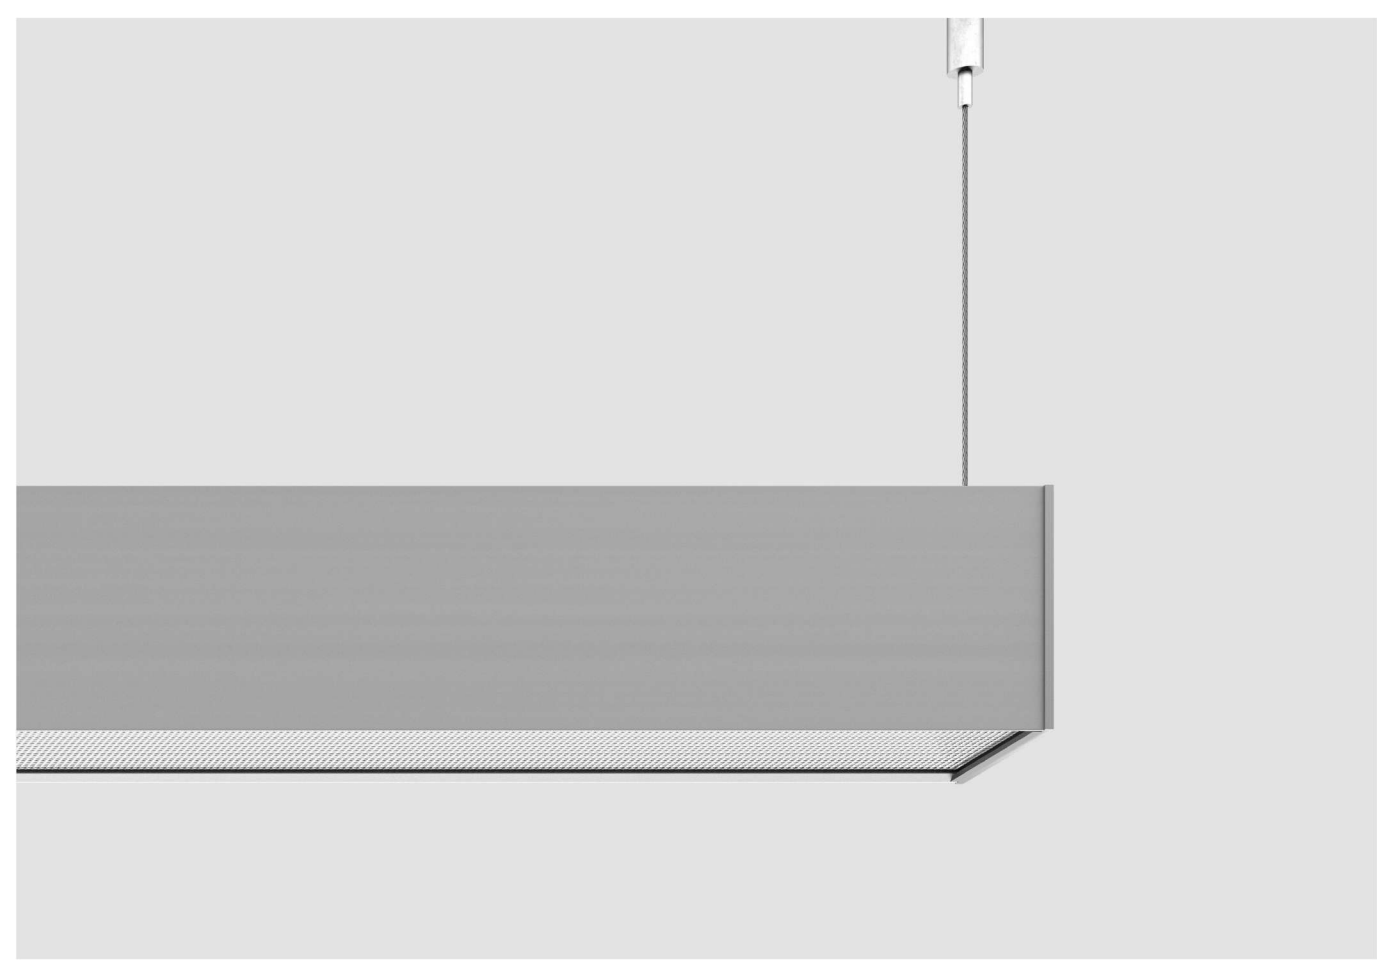


FLUX INFORMATION [LED] DIRECT - INDIRECT	DI / IN
CL-ZW 2200 - 26W VW	2110 / 1050 lm
CL-ZW 2200 - 26W WW	2150 / 1070 lm
CL-ZW 2200 - 26W NW	2250 / 1120 lm
CL-ZW 4400 - 54W VW	4230 / 2115 lm
CL-ZW 4400 - 54W WW	4300 / 2150 lm
CL-ZW 4400 - 54W NW	4500 / 2250 lm
CL-ZW 6600 - 67W VW	6100 / 3050 lm
CL-ZW 6600 - 67W WW	6200 / 3100 lm
CL-ZW 6600 - 67W NW	6500 / 3250 lm
CL-ZW 8800 - 98W VW	8260 / 4130 lm
CL-ZW 8800 - 98W WW	8400 / 4300 lm
CL-ZW 8800 - 98W NW	8800 / 4500 lm

TYPE
CL-ZW 2200
CL-ZW 4400
CL-ZW 6600
CL-ZW 8800

LED COLOR
very warm white 2700K
warm white 3000K
neutral white 4000K

DIFFUSER / OPTICS
M-PRM
opal
PAR

VERSION
Direct
Direct - indirect
e.g. CL-ZW 8800 WW MP DI



FLUX INFORMATION [LED] DIRECT	DI
CL-ZW 2200 - 20W VW	2220 lm
CL-ZW 2200 - 20W WW	2260 lm
CL-ZW 2200 - 20W NW	2370 lm
CL-ZW 4400 - 35W VW	4230 lm
CL-ZW 4400 - 35W WW	4300 lm
CL-ZW 4400 - 35W NW	4500 lm
CL-ZW 6600 - 54W VW	6290 lm
CL-ZW 6600 - 54W WW	6400 lm
CL-ZW 6600 - 54W NW	6700 lm
CL-ZW 8800 - 63W VW	8270 lm
CL-ZW 8800 - 63W WW	8400 lm
CL-ZW 8800 - 63W NW	8800 lm

IN OPTION



CL EM

IN OPTION



CL PLUS

