


CRD 6, 9, 12

| | |
|---------------------|-----------------------------|
| Application | Recessed ceiling luminaires |
| Installation | Outdoor |
| Mounting | Recessed |
| Material | Anodized cast aluminium |
| Details | Stainless steel ring 316L |
| CRI | Min 80 |
| Options | - |
| Power supply | 230V, 50 Hz |
| Safety class | I or II (in option) |

CE IP67

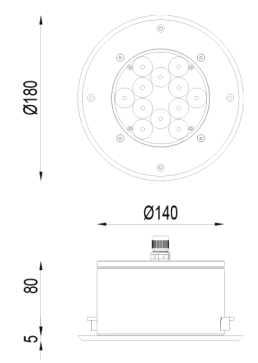

WEIGHT 3,9 kg



| TYPE DIRECT | | | | |
|---------------------|-----|-----|-----|--------|
| 6LED - 10W | CRD | 6 | ... | ... |
| 9LED - 13W | CRD | 9 | ... | ... |
| 12LED - 17W | CRD | 12 | ... | ... |
| LED COLOR | | | | |
| cool white 6500K | CRD | ... | CW | ... |
| neutral white 4000K | CRD | ... | NW | ... |
| warm white 3000K | CRD | ... | WW | ... |
| RED | CRD | ... | R | ... |
| GREEN | CRD | ... | G | ... |
| BLUE | CRD | ... | B | ... |
| ROYAL BLUE | CRD | ... | RB | ... |
| AMBER | CRD | ... | A | ... |
| RGB | CRD | ... | RGB | ... |
| OPTIC | | | | |
| 7,5° | CRD | ... | ... | 7,5° |
| 15° | CRD | ... | ... | 15° |
| 25° | CRD | ... | ... | 25° |
| 45° | CRD | ... | ... | 45° |
| 10x41° | CRD | ... | ... | 10x41° |
| 22x40° | CRD | ... | ... | 22x40° |
| 16x90° | CRD | ... | ... | 16x90° |
| asymetric | CRD | ... | ... | AS |
| wall-wash | CRD | ... | ... | WS |

