


CRN

CE IP67

Application	Ceiling luminaires designed for pedestrian tracks or building entries
Installation	Outdoor and indoor
Mounting	Ceiling
Material	Anodized cast aluminium
Details	Graphite as a standard
CRI	Min 80
Options	Other RAL coating
Power supply	230V, 50 Hz
Safety class	I or II (in option)

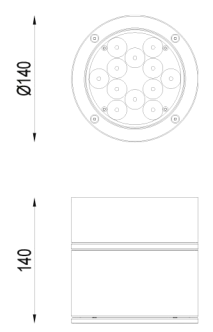

WEIGHT 3,3 kg





REVA CRN (9LED - 13W)

TYPE				
6LED - 10W	CRN	6
9LED - 13W	CRN	9
12LED - 17W	CRN	12

LED COLOR				
cool white 6500K	CRN	...	CW	...
neutral white 4000K	CRN	...	NW	...
warm white 3000K	CRN	...	WW	...
RED	CRN	...	R	...
GREEN	CRN	...	G	...
BLUE	CRN	...	B	...
ROYAL BLUE	CRN	...	RB	...
AMBER	CRN	...	A	...
RGB	CRN	...	RGB	...

OPTIC				
7,5°	CRN	7,5°
15°	CRN	15°
25°	CRN	25°
45°	CRN	45°
10x41°	CRN	10x41°
22x40°	CRN	22x40°
16x90°	CRN	16x90°
asymetric	CRN	AS
wall-wash	CRN	WW
e.g.	CRN	12	WW	45°

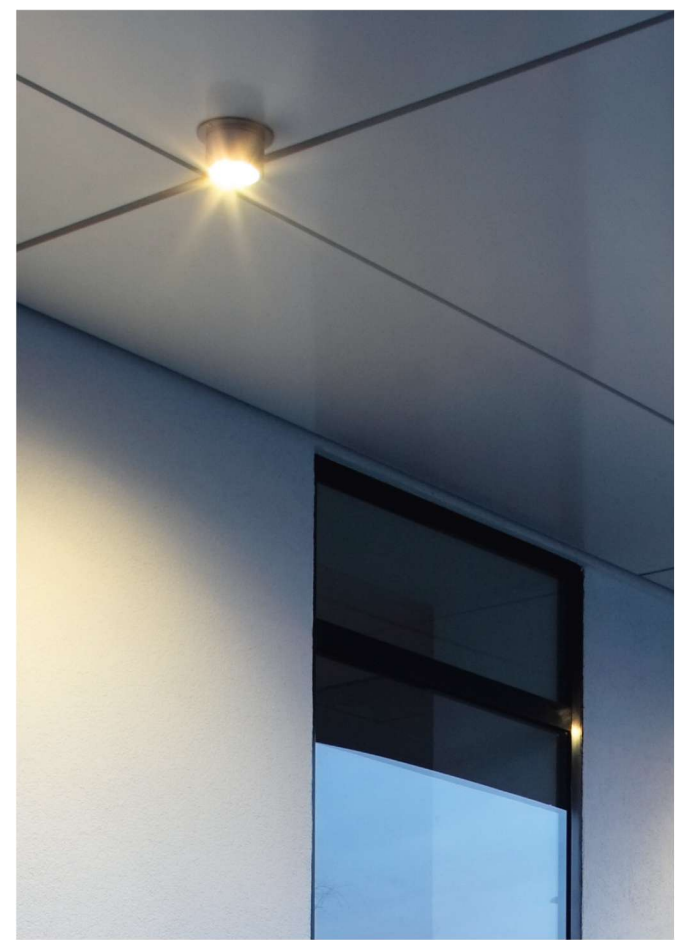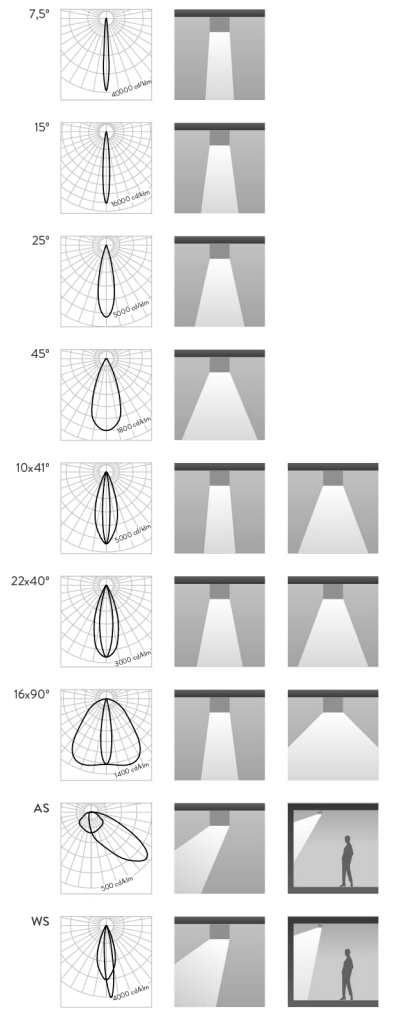

Pentagon (Gdynia, Poland)