


# CRX

<b>Application</b>	Wall luminaires, designed for architectural and modern building illuminations. Available in 2 versions: direct and direct-indirect.
<b>Installation</b>	Outdoor and indoor
<b>Mounting</b>	Wall
<b>Material</b>	Anodized cast aluminium
<b>Details</b>	Graphite as a standard
<b>CRI</b>	Min 80
<b>Options</b>	Other RAL coating
<b>Power supply</b>	230V, 50 Hz
<b>Safety class</b>	I or II (in option)

CE IP67



WEIGHT 3,5 kg



**TYPE DIRECT**

6LED - 10W DI	CRX	6	...	...
9LED - 13W DI	CRX	9	...	...
12LED - 17W DI	CRX	12	...	...

**TYPE DIRECT - INDIRECT**


2x3LED-10W DI-IN	CRX	3-3	...	...
2x6LED-17W DI-IN	CRX	6-6	...	...

**LED COLOR**

cool white 6500K	CRX	...	CW	...
neutral white 4000K	CRX	...	NW	...
warm white 3000K	CRX	...	WW	...
RED	CRX	...	R	...
GREEN	CRX	...	G	...
BLUE	CRX	...	B	...
ROYAL BLUE	CRX	...	RB	...
AMBER	CRX	...	A	...
RGB	CRX	...	RGB	...

**OPTIC**

7,5°	CRX	...	...	7,5°
15°	CRX	...	...	15°
25°	CRX	...	...	25°
45°	CRX	...	...	45°
10x41°	CRX	...	...	10x41°
22x40°	CRX	...	...	22x40°
16x90°	CRX	...	...	16x90°
asymetric	CRX	...	...	AS
wall-wash	CRX	...	...	WW
e.g.	CRX	12	WW	45°

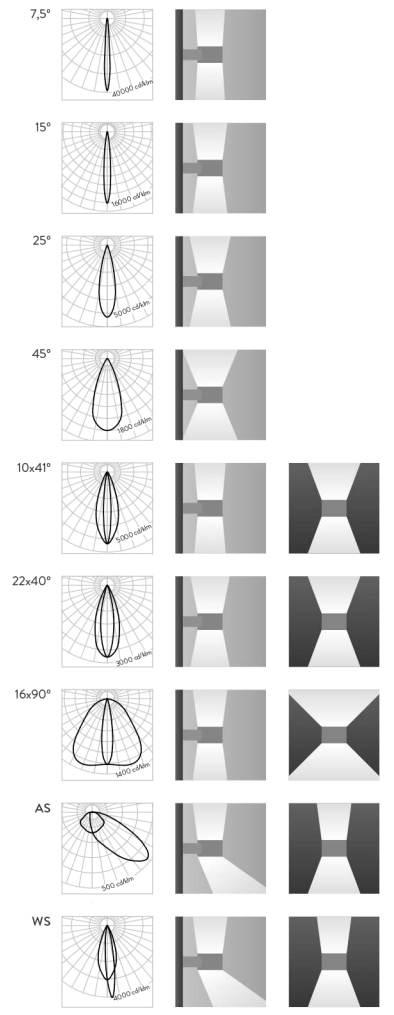

REVA CRX (12LED - 17W)

Hotel Młyn (Wrocław, Poland)