



CV ONE

CE IP20

Application	Modern floodlights, dedicated to general lighting sales and exhibition spaces.
Installation	Indoor
Mounting	Ceiling or track system
Material	Anodized aluminium
Details	Graphite as a standard
CRI	Min 80
Options	Other RAL coating, CRI >80
Power supply	230V, 50Hz
Safety class	I

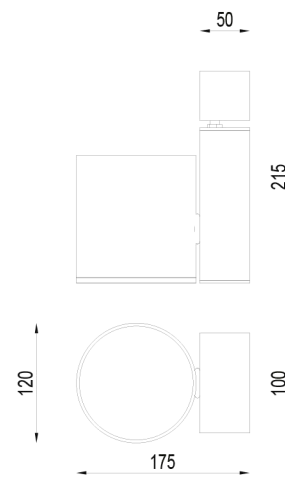

TYPE	CV ONE
WEIGHT	2,4 kg

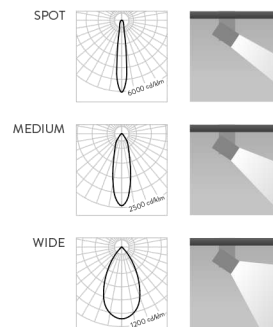

REVA CV ONE



Media Library (Sopot, Poland)

TYPE				
CV ONE 28W	CV ONE 28 W
CV ONE 38 W	CV ONE 38 W
LED COLOR				
warm white 3000K	CV	...	WW	...
neutral white 4000K	CV	...	NW	...
cool white 6500K	CV	...	CW	...
OPTIC				
SPOT	CV	SPOT
MEDIUM	CV	MEDIUM
WIDE	CV	WIDE
e.g.	CV	28 W	WW	SPOT

FLUX INFORMATION [LED]		
CV ONE 28W	WW	2400 lm
CV ONE 28W	NW	2500 lm
CV ONE 28W	CW	2700 lm
CV ONE 38 W	WW	3300 lm
CV ONE 38 W	NW	3500 lm
CV ONE 38 W	CW	3700 lm