


CV 12



Application	Modern floodlights, dedicated to general lighting sales and exhibition spaces.
Installation	Indoor
Mounting	Ceiling or track system
Material	Anodized aluminium
Details	Graphite as a standard
CRI	Min 80
Options	Other RAL coating, CRI >80
Power supply	230V, 50Hz
Safety class	I

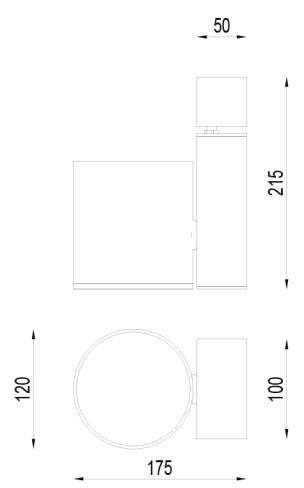

TYPE	CV 12
WEIGHT	2,2 kg



TYPE	
12LED - 17W	CV 12
12LED - 30W	CV 12

IN OPTION


LED COLOR	
warm white 3000K	CV ... WW ...
neutral white 4000K	CV ... NW ...
cool white 6500K	CV ... CW ...
RED	CV ... R ...
GREEN	CV ... G ...
BLUE	CV ... B ...
ROYAL BLUE	CV ... RB ...
AMBER	CV ... A ...
RGB	CV ... RGB ...



CV-W (Wall mounted)

OPTIC				
7,5°	CV	7,5°
15°	CV	15°
25°	CV	25°
45°	CV	45°
10x41°	CV	10x41°
22x40°	CV	22x40°
16x90°	CV	16x90°
e.g.	CV	12	RB	45°

FLUX INFORMATION [LED]		
CV 12LED 17W	WW	1280 lm
CV 12LED 17W	NW	1370 lm
CV 12LED 17W	CW	1460 lm
CV 12LED 30W	WW	2180 lm
CV 12LED 30W	NW	2330 lm
CV 12LED 30W	CW	2480 lm

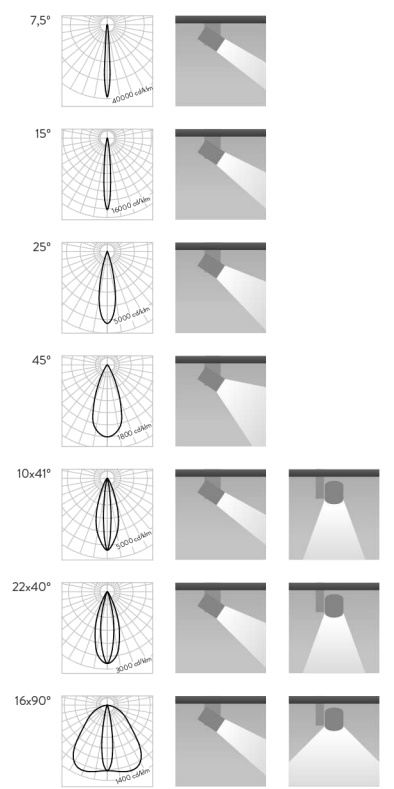

Media Library (Sopot, Poland)