


# HB 1, 2



<b>Application</b>	Industrial High-Bay luminaires, designed for warehouses and manufacturing areas
<b>Installation</b>	Indoor
<b>Mounting</b>	Surface or wall-mounted
<b>Material</b>	Anodized aluminium
<b>Details</b>	Grey as a standard
<b>CRI</b>	Min 70
<b>Options</b>	Other RAL coating, CRI >70
<b>Power supply</b>	230V, 50Hz
<b>Safety class</b>	I

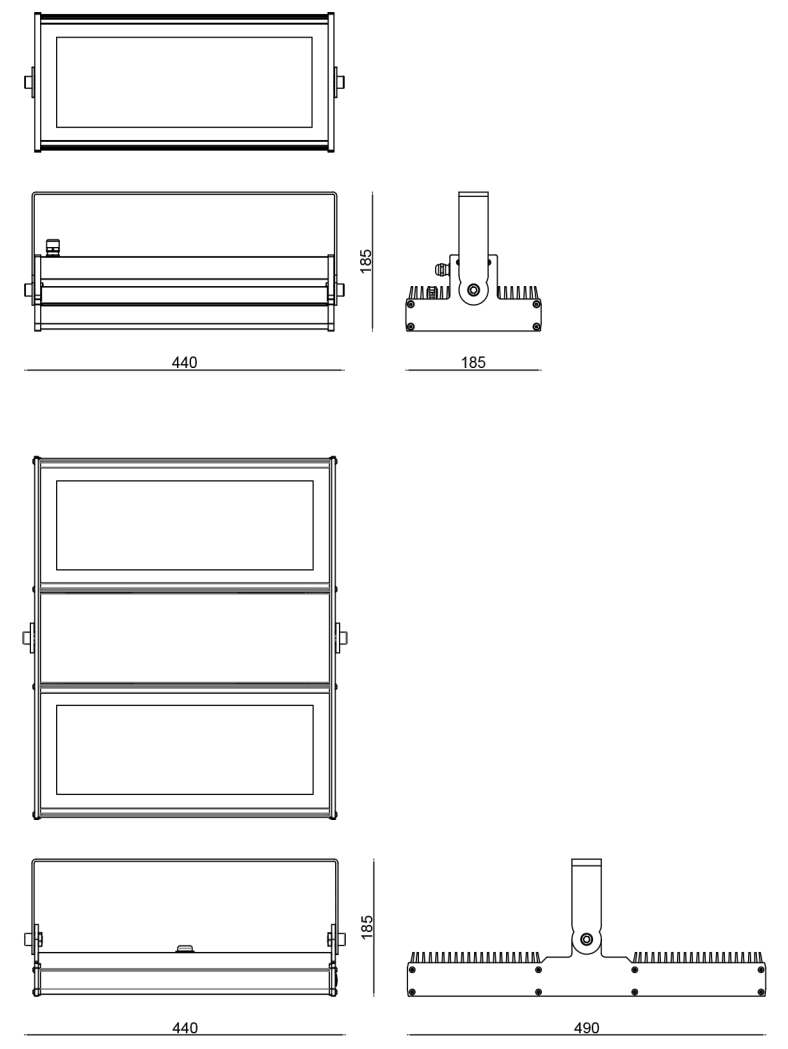

TYPE				
HB1	HB1	...	...	...
HB2	HB2	...	...	...

POWER				
HB 1 - 75W	...	75 W	...	...
HB 1 - 112W	...	112 W	...	...
HB 2 - 150W	...	150 W	...	...
HB 2 - 225W	...	225 W	...	...

LED COLOR				
warm white	3000K	...	...	WW
neutral white	4000K	...	...	WNW
neutral white	4500K	...	...	NW
cool white	5700K	...	...	CW

OPTIC				
medium	...	...	...	M
wide	...	...	...	W
extra wide	...	...	...	WW
oval	...	...	...	OV
microprism	...	...	...	MP
no optics	...	...	...	NO

e.g. HB 1 75 W NW MP

<b>TYPE</b>	HB 1	HB 2
<b>WEIGHT</b>	8,5 kg	13,2 kg

FLUX INFORMATION [LED]		
HB 1 - 75 W	WW	8300 lm
HB 1 - 75 W	WNW	9700 lm
HB 1 - 75 W	NW	9700 lm
HB 1 - 75 W	CW	11400 lm
HB 1 - 112 W	WW	11100 lm
HB 1 - 112 W	WNW	13000 lm
HB 1 - 112 W	NW	13000 lm
HB 1 - 112 W	CW	15300 lm

FLUX INFORMATION [LED]		
HB 2 - 150W	WW	16700 lm
HB 2 - 150W	WNW	19400 lm
HB 2 - 150W	NW	19400 lm
HB 2 - 150W	CW	22800 lm
HB 2 - 225W	WW	22300 lm
HB 2 - 225W	WNW	26000 lm
HB 2 - 225W	NW	26000 lm
HB 2 - 225W	CW	30500 lm

