



HL



Application	Wall luminaires, designed for architectural and modern building illuminations. Creating light effects, exposing and highlighting details of the illuminated objects.
Installation	Outdoor or indoor
Mounting	Wall or ceiling
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating
Power supply	230V, 50 Hz
Safety class	I or II (in option)

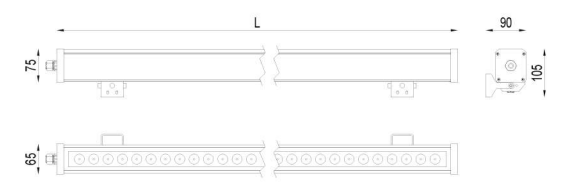

TYPE	9LED - 12W	18LED - 24W	27LED - 34W	36LED - 45W
WEIGHT	3,25 kg	4,1 kg	4,95 kg	5,8 kg
L	330mm	610mm	890mm	1170mm

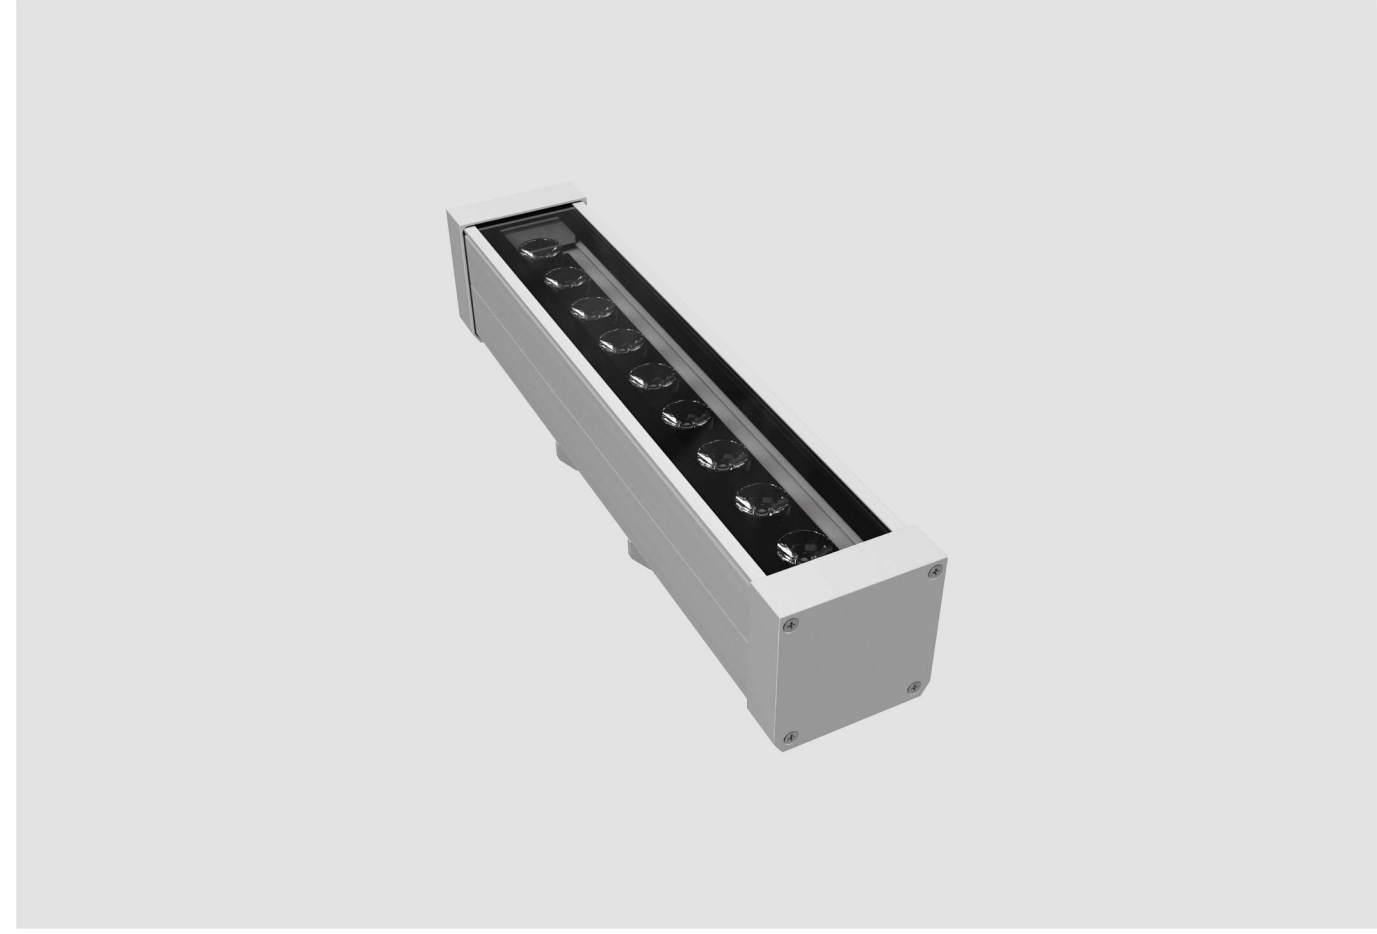

TYPE				
9LED - 12W	HL	9
18LED - 24W	HL	18
27LED - 34W	HL	27
36LED - 45W	HL	36
LED COLOR				
cool white 6500K	HL	...	CW	...
neutral white 4000K	HL	...	NW	...
warm white 3000K	HL	...	WW	...
RED	HL	...	R	...
GREEN	HL	...	G	...
BLUE	HL	...	B	...
ROYAL BLUE	HL	...	RB	...
AMBER	HL	...	A	...
RGB	HL	...	RGB	...
OPTIC				
7,5°	HL	7,5°
15°	HL	15°
25°	HL	25°
45°	HL	45°
10x41°	HL	10x41°
22x40°	HL	22x40°
16x90°	HL	16x90°
e.g.	HL	18	WW	25°

