



HLW




- Application** Recessed wall luminaires designed for communication tracks.
- Installation** Outdoor
- Mounting** Recessed
- Material** Anodized aluminium
- Details** Stainless steel ring 316L
- CRI** Min 80
- Options** IP68 on special request
- Power supply** 230V, 50 Hz
- Safety class** I or II (in option)

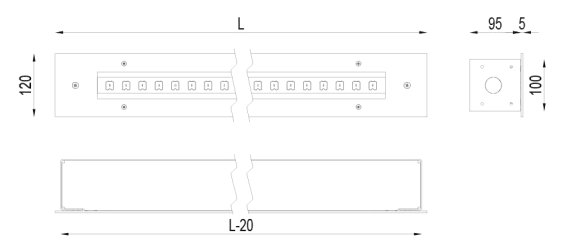

TYPE	9LED - 12W	18LED - 24W	27LED - 34W	36LED - 45W
WEIGHT	7,8 kg	13 kg	18 kg	22,5 kg
L	442mm	720mm	1004mm	1282mm

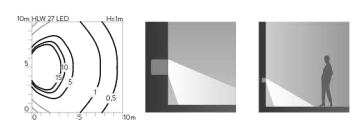

TYPE				
9LED - 12W	HLW	9
18LED - 24W	HLW	18
27LED - 34W	HLW	27
36LED - 45W	HLW	36
LED COLOR				
cool white 6500K	HLW	...	CW	...
neutral white 4000K	HLW	...	NW	...
warm white 3000K	HLW	...	WW	...
RED	HLW	...	R	...
GREEN	HLW	...	G	...
BLUE	HLW	...	B	...
ROYAL BLUE	HLW	...	RB	...
AMBER	HLW	...	A	...
RGB	HLW	...	RGB	...
OPTIC				
asymetric	HLW	AS
e.g.	HLW	18	WW	AS

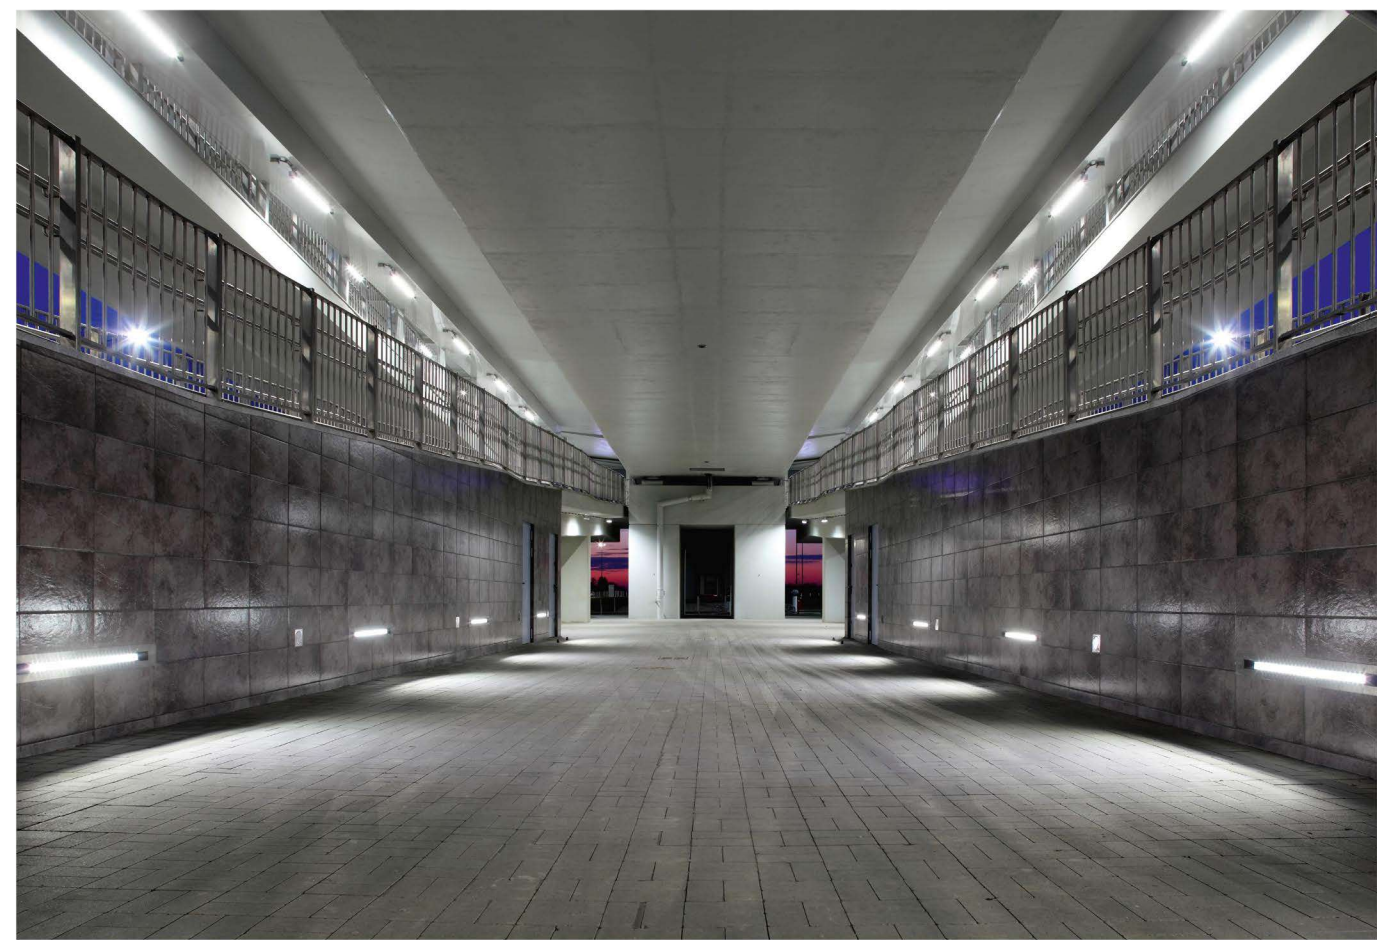

REVA HLW (36LED - 45W)

Pomeranian Metropolitan Railway (Gdańsk, Poland)