


QL LED 400 / 595

CE IP20 IP40 IP44 PZH



TYPE	QL 400	QL 595
WEIGHT	3 kg	6,8 kg
A	400mm	595mm

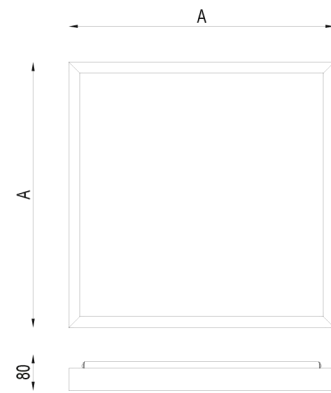

Application	Modern luminaires, designed for office spaces, flats and pedestrian walkways.
Installation	Indoor
Mounting	Ceiling
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating, higher Cri, CRI >80, IP44
Power supply	230V, 50Hz
Safety class	I

TYPE			
QL 400 - 20W	QL 400 - 20W
QL 400 - 30W	QL 400 - 30W
QL 595 - 26W	QL 595 - 26W
QL 595 - 39W	QL 595 - 39W
QL 595 - 48W	QL 595 - 48W

LED COLOR			
very warm white 2700K	QL	...	VW
warm white 3000K	QL	...	WW
neutral white 4000K	QL	...	NW

DIFFUSER / OPTICS			
M-PRM	MP
opal	OP
e.g.	QL 595 - 39W	NW	MP

FLUX INFORMATION [LED] DIRECT		DI
QL 400 - 20W	VW	2680 lm
QL 400 - 20W	WW	2720 lm
QL 400 - 20W	NW	2850 lm
QL 400 - 30W	VW	3660 lm
QL 400 - 30W	WW	3720 lm
QL 400 - 30W	NW	3900 lm
QL 595 - 26W	VW	3190 lm
QL 595 - 26W	WW	3250 lm
QL 595 - 26W	NW	3400 lm
QL 595 - 39W	VW	4600 lm
QL 595 - 39W	WW	4680 lm
QL 595 - 39W	NW	4900 lm
QL 595 - 48W	VW	5350 lm
QL 595 - 48W	WW	5440 lm
QL 595 - 48W	NW	5700 lm

