



QL LED 1200 / 1800

CE IP20 IP40 IP44 PZH

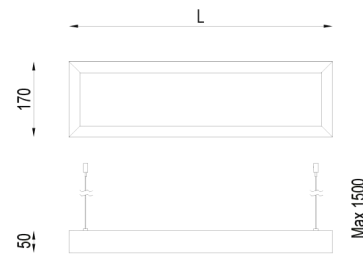

TYPE	QL 1200	QL 1800
WEIGHT	4,1 kg	5,9 kg
L	1200mm	1760mm

Application	Modern luminaires, designed for office spaces, flats and pedestrian walkways.
Installation	Indoor
Mounting	Suspended and ceiling
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating, CRI >80
Power supply	230V, 50Hz
Safety class	I

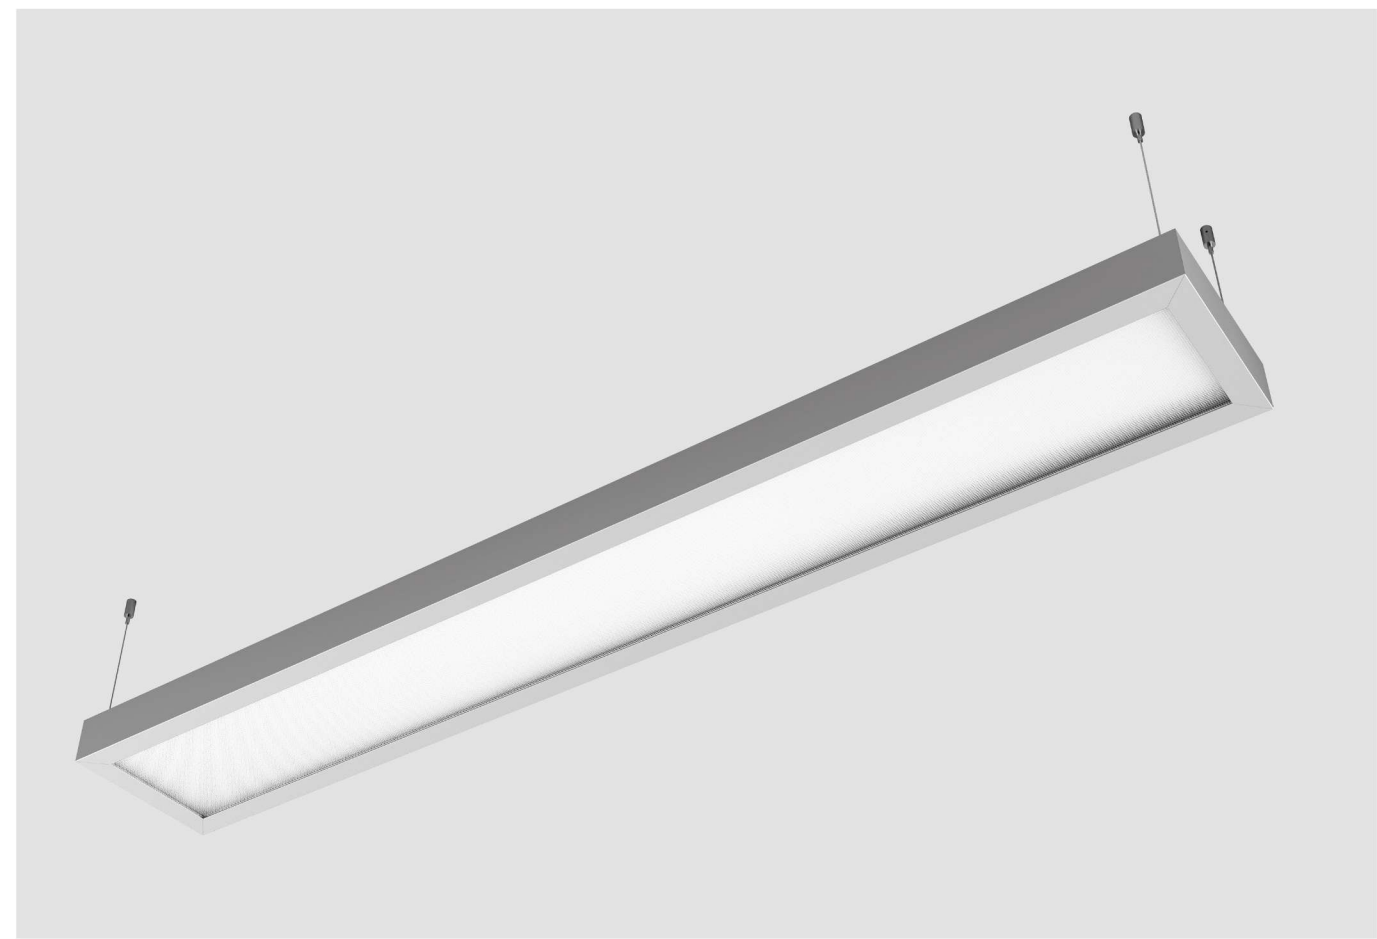


REVA QLLED 1200 / 1800

TYPE				
QL 1200	QL	1200
QL 1800	QL	1800
LED COLOR				
very warm white 2700K	QL	...	VW	...
warm white 3000K	QL	...	WW	...
neutral white 4000K	QL	...	NW	...
DIFFUSER / OPTICS				
M-PRM	MP
opal	OP
PAR	PAR
VERSION				
Direct
Direct - indirect	DI-IN
e.g.	QL	1800	NW	MP
				DI-IN



FLUX INFORMATION [LED] DIRECT		DI
QL 1200 - 35W	VW	4220 lm
QL 1200 - 35W	WW	4300 lm
QL 1200 - 35W	NW	4500 lm
QL 1800 - 54W	VW	6290 lm
QL 1800 - 54W	WW	6400 lm
QL 1800 - 54W	NW	6700 lm

FLUX INFORMATION [LED] DIRECT - INDIRECT		DI / IN
QL 1200 - 58W	VW	3570 / 3570 lm
QL 1200 - 58W	WW	3600 / 3600 lm
QL 1200 - 58W	NW	3800 / 3800 lm
QL 1800 - 65W	VW	4650 / 4650 lm
QL 1800 - 65W	WW	4700 / 4700 lm
QL 1800 - 65W	NW	4950 / 4950 lm

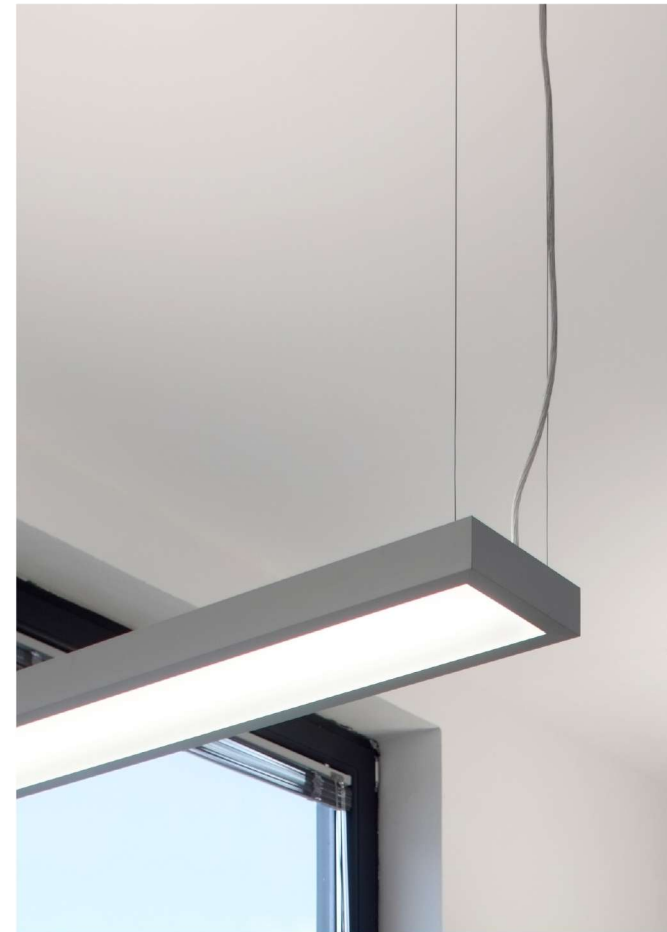

REVA / ARQ office (Gdańsk, Poland)