


RPM

Application	Recessed luminaires designed for offices spaces, flats and corridors.
Installation	Indoor
Mounting	Plaster-cardboard or modular ceilings
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating, CRI >80, IP44 on special request
Power supply	230V, 50Hz
Safety class	I

CE IP20 IP40 IP44 PZH

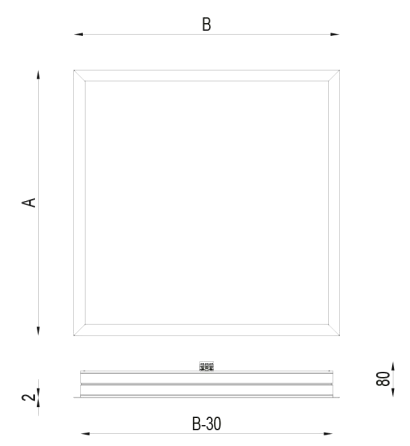

TYPE	RPM 330	RPM 595	RPM 1195
WEIGHT	2,4 kg	5,2 kg	5,8kg
A x B	330 x 330 [mm]	595 x 595 [mm]	1195 x 295 [mm]

TYPE			
RPM 330 - 20W	RPM 330 - 20W
RPM 330 - 30W	RPM 330 - 30W
RPM 595 - 26W	RPM 595 - 26W
RPM 595 - 39W	RPM 595 - 39W
RPM 595 - 48W	RPM 595 - 48W
RPM 1195 - 26W	RPM 1195 - 26W
RPM 1195 - 39W	RPM 1195 - 39W
RPM 1195 - 48W	RPM 1195 - 48W

LED COLOR			
very warm white 2700K	RPM	...	VW
warm white 3000K	RPM	...	WW
neutral white 4000K	RPM	...	NW

DIFFUSER / OPTICS			
M-PRM	MP
opal	OP
e.g.	RPM 595 - 39W	NW	MP

IN OPTION



VINSTA® System

FLUX INFORMATION [LED] DIRECT		DI
RPM 330 - 20W	VW	2680 lm
RPM 330 - 20W	WW	2720 lm
RPM 330 - 20W	NW	2850 lm
RPM 330 - 30W	VW	3660 lm
RPM 330 - 30W	WW	3720 lm
RPM 330 - 30W	NW	3900 lm
RPM 595 - 26W	VW	3190 lm
RPM 595 - 26W	WW	3250 lm
RPM 595 - 26W	NW	3400 lm
RPM 595 - 39W	VW	4600 lm
RPM 595 - 39W	WW	4680 lm
RPM 595 - 39W	NW	4900 lm

FLUX INFORMATION [LED] DIRECT		DI
RPM 595 - 48W	VW	5350 lm
RPM 595 - 48W	WW	5440 lm
RPM 595 - 48W	NW	5700 lm
RPM 1195 - 26W	VW	3190 lm
RPM 1195 - 26W	WW	3250 lm
RPM 1195 - 26W	NW	3400 lm
RPM 1195 - 39W	VW	4600 lm
RPM 1195 - 39W	WW	4680 lm
RPM 1195 - 39W	NW	4900 lm
RPM 1195 - 48W	VW	5350 lm
RPM 1195 - 48W	WW	5440 lm
RPM 1195 - 48W	NW	5700 lm



In co-operation with Kinmarps Company (Gdańsk, Poland)