


VL 1, 3, 4, 5, 1 L



Application	Industrial luminaires designed for storage areas and all types of industrial spaces.
Installation	Indoor and outdoor
Mounting	Ceiling
Material	Anodized aluminium
Details	-
CRI	Min 70
Options	Other RAL coating, CRI >70
Power supply	230V, 50Hz
Safety class	I

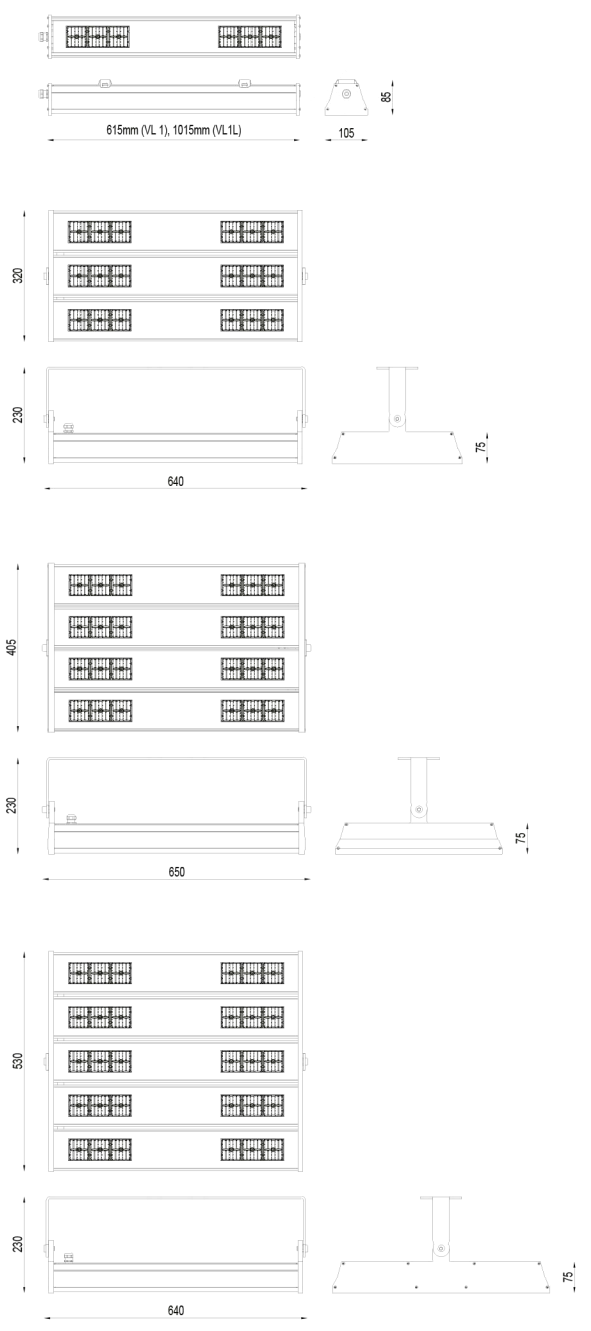

POWER / FLUX				FLUX INFORMATION [LED]			
VL1 - 48W	VL1	VL1 - 48W	WW	4800	lm
VL3 - 144W	VL3	VL1 - 48W	WNW	5600	lm
VL4 - 192W	VL4	VL1 - 48W	NW	5600	lm
VL5 - 240W	VL5	VL1 - 48W	CW	6600	lm
VL1L - 88W	VL1L	VL3 - 144W	WW	14400	lm
LED COLOR				VL3 - 144W	WNW	16800	lm
warm white 3000K	...	WW	...	VL3 - 144W	NW	16800	lm
neutral white 4000K	...	WNW	...	VL3 - 144W	CW	19800	lm
neutral white 4500K	...	NW	...	VL4 - 192W	WW	19200	lm
cool white 5700K	...	CW	...	VL4 - 192W	WNW	22400	lm
OPTIC				VL4 - 192W	NW	22400	lm
medium	...	M	...	VL4 - 192W	CW	26400	lm
wide	...	W	...	VL5 - 240W	WW	24000	lm
extra wide	...	WW	...	VL5 - 240W	WNW	28000	lm
oval	...	OV	...	VL5 - 240W	NW	28000	lm
microprism	...	MP	...	VL5 - 240W	CW	33000	lm
no optics	...	NO	...	VL1L - 88W	WW	9500	lm
e.g.	VL1L	WW	NO	VL1L - 88W	WNW	11000	lm
				VL1L - 88W	NW	11000	lm
				VL1L - 88W	CW	12900	lm

TYPE	VL1	VL3	VL4	VL5	VL1L
WEIGHT	2,8 kg	9,9 kg	12,7 kg	15,5 kg	4,4 kg

