

VLG

CE IP65

Application	Hermetic luminaires designed for all types of industrial spaces.
Installation	Indoor and outdoor
Mounting	Celling
Material	Anodized aluminium
Details	-
CRI	Min 80
Options	Other RAL coating
Power supply	230V, 50Hz
Safety class	I



TYPE	VLG 600	VLG 1200
WEIGHT	2,8 kg	5,1 kg



POWER / FLUX

VLG 600 - 39W	VLG 600
VLG 1200 - 69W	VLG 1200

LED COLOR

warm white 3000K	...	WW	...
neutral white 4000K	...	NW	...
cool white 5000K	...	CW	...


OPTIC

microprism	M
------------	-----	-----	---

e.g. VLG1200 WW MP

FLUX INFORMATION [LED]

VLG 600 - 39 W	WW	4600 lm
VLG 600 - 39 W	NW	4800 lm
VLG 600 - 39 W	CW	4950 lm
VLG 1200 - 69 W	WW	9200 lm
VLG 1200 - 69 W	NW	9600 lm
VLG 1200 - 69 W	CW	9900 lm

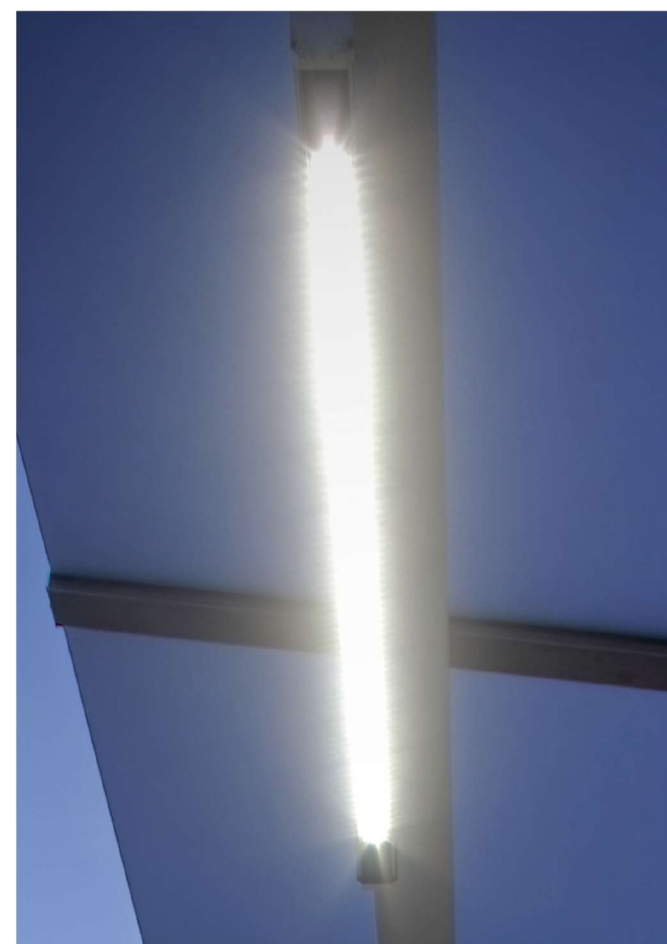

Pomeranian Metropolitan Railway (Poland)